


AÉROWING GATE



AéroWing - One of a Kind

When it comes to harmonious integration into elegant environments, the T1 AéroWing Gate is an objet d'art. Its inherent simplicity showcases not only its unique airy T-shaped design, it epitomizes as well the lightweight essence. Vibrant LED lights, leading verification technologies, and standard safety measures are all in place to ensure a pleasant authentication process, guiding users to authorized areas while offering an aesthetic appeal.

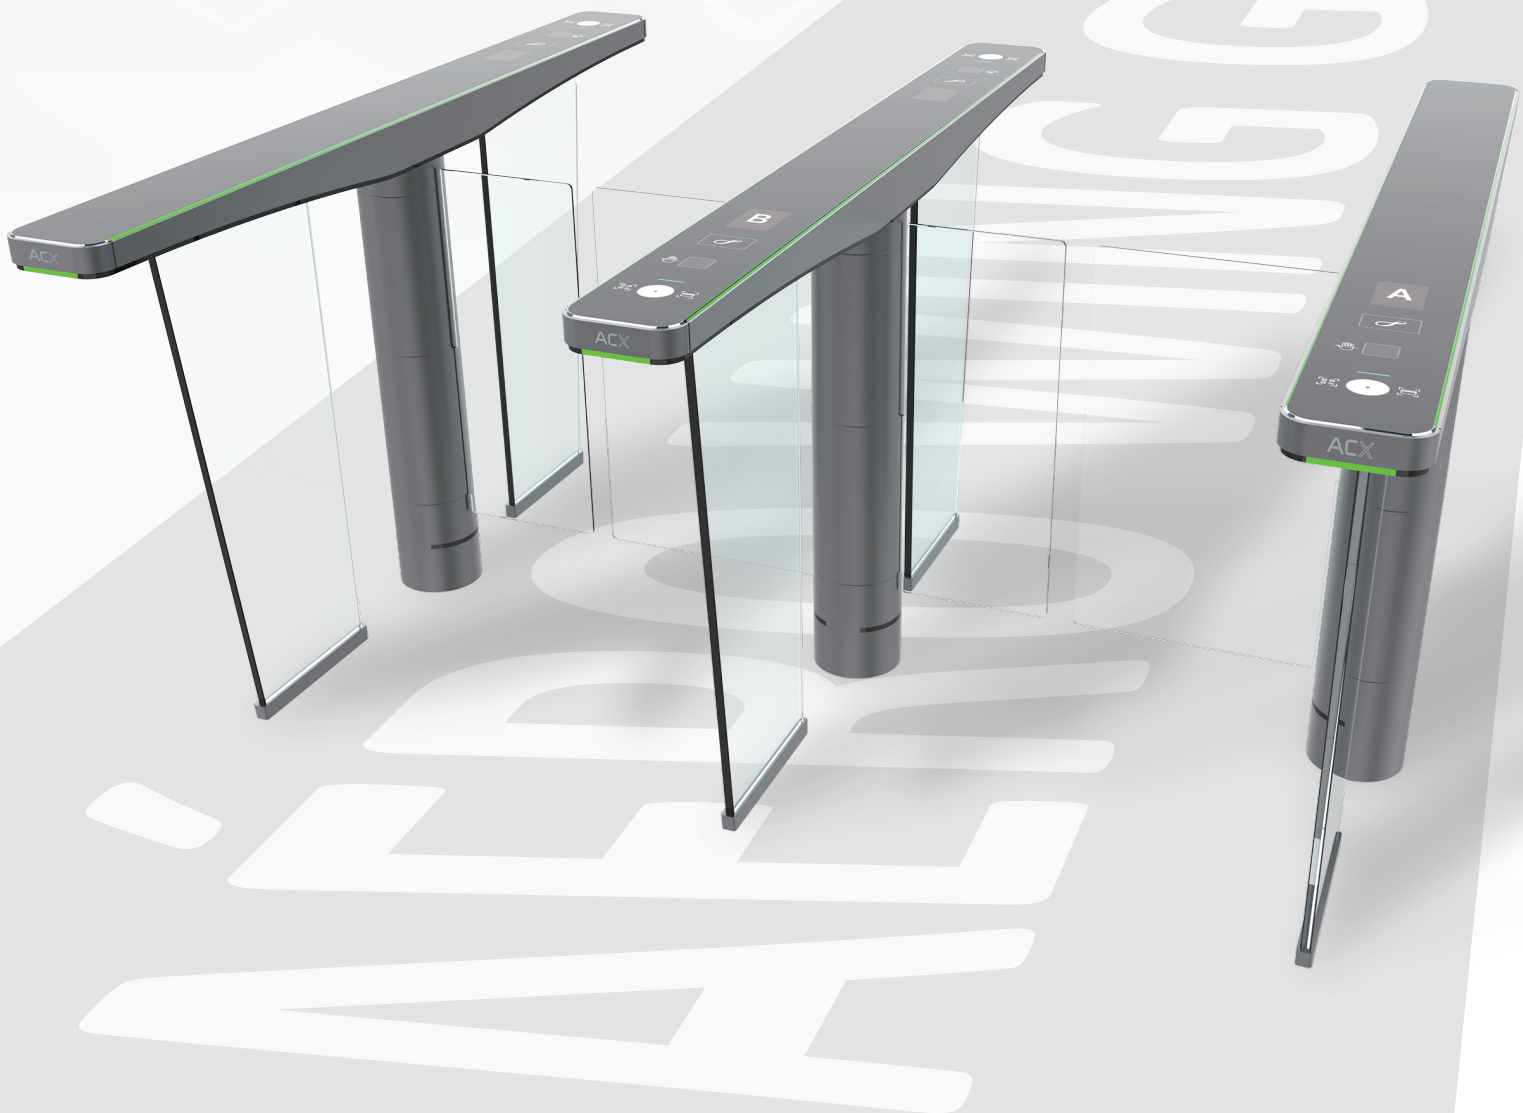

Scope of Application



PS: within the height range

Idea for: data centers / corporate offices / multistory buildings / educational institutions / financial institutions



Support

Temperature Check



Facial Recognition



Palm Vein



13.56MHZ



Scramble QR Code




Octopus



Specifications

| | |
|---------------------|--------------------|
| • Model | T1 |
| • Cabinet Material | AISI#304 |
| • Usage | Indoor only |
| • Size | 1800*180*1000 (mm) |
| • Obstacle Material | 8mm tempered glass |
| • Width | 600mm / 900mm |

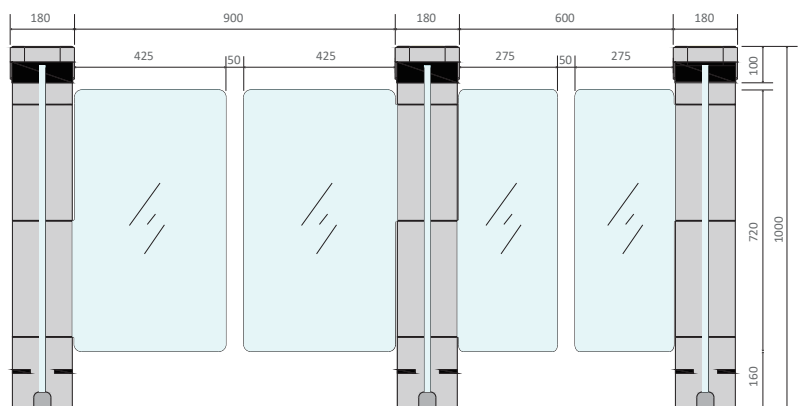

Highlights



9 dual-direction control modes



LED lights status / direction indication



Advanced protection to prevent electrical leakage, pinching, and collision



Remote control and configuration, user interface personalization



High detection accuracy using laser sensor





2D laser module: ground-level safety sensor for child-friendly passage



Standard external electrical interface, with photoelectric safety isolation



Enhanced anti-tailgating design

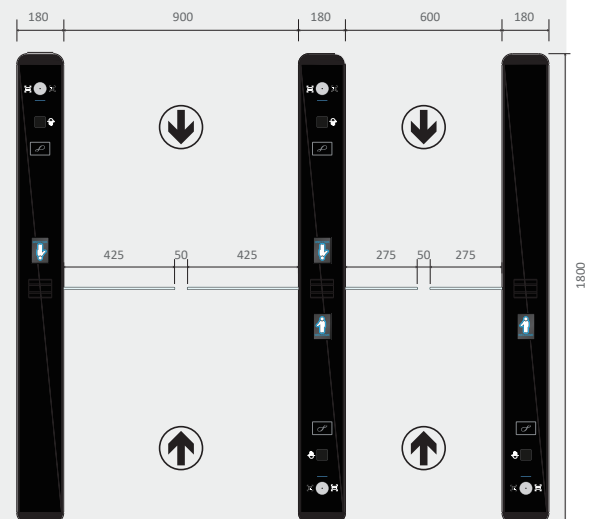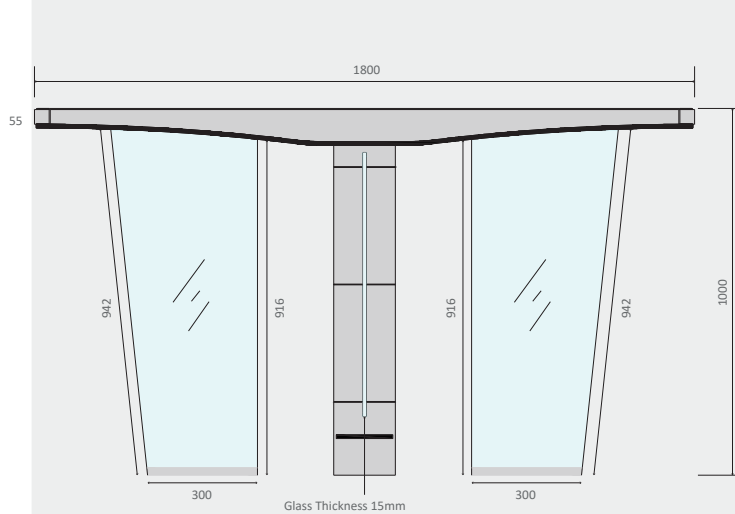

Customization

- Colour spray or electroplating appearance
- Gate length
- Wiredrawing (standard) / glossy / mate surface
- Obstacle length / height / printed pattern
- Printed pattern in card area
- Biometric authentication methods
- Flooring panels during installation (floor slotting not required)

