


T1

AÉROWING GATE




T1 AéroWing - One of a Kind

When it comes to harmonious integration into elegant environments, the T1 AéroWing Gate is an objet d'art. Its inherent simplicity showcases not only its unique airy T-shaped design, it epitomizes the lightweight essence. Vibrant LED lights, leading verification technologies, and standard safety measures are all in place to ensure a pleasant authentication process, guiding users to authorized areas while offering an aesthetic appeal.

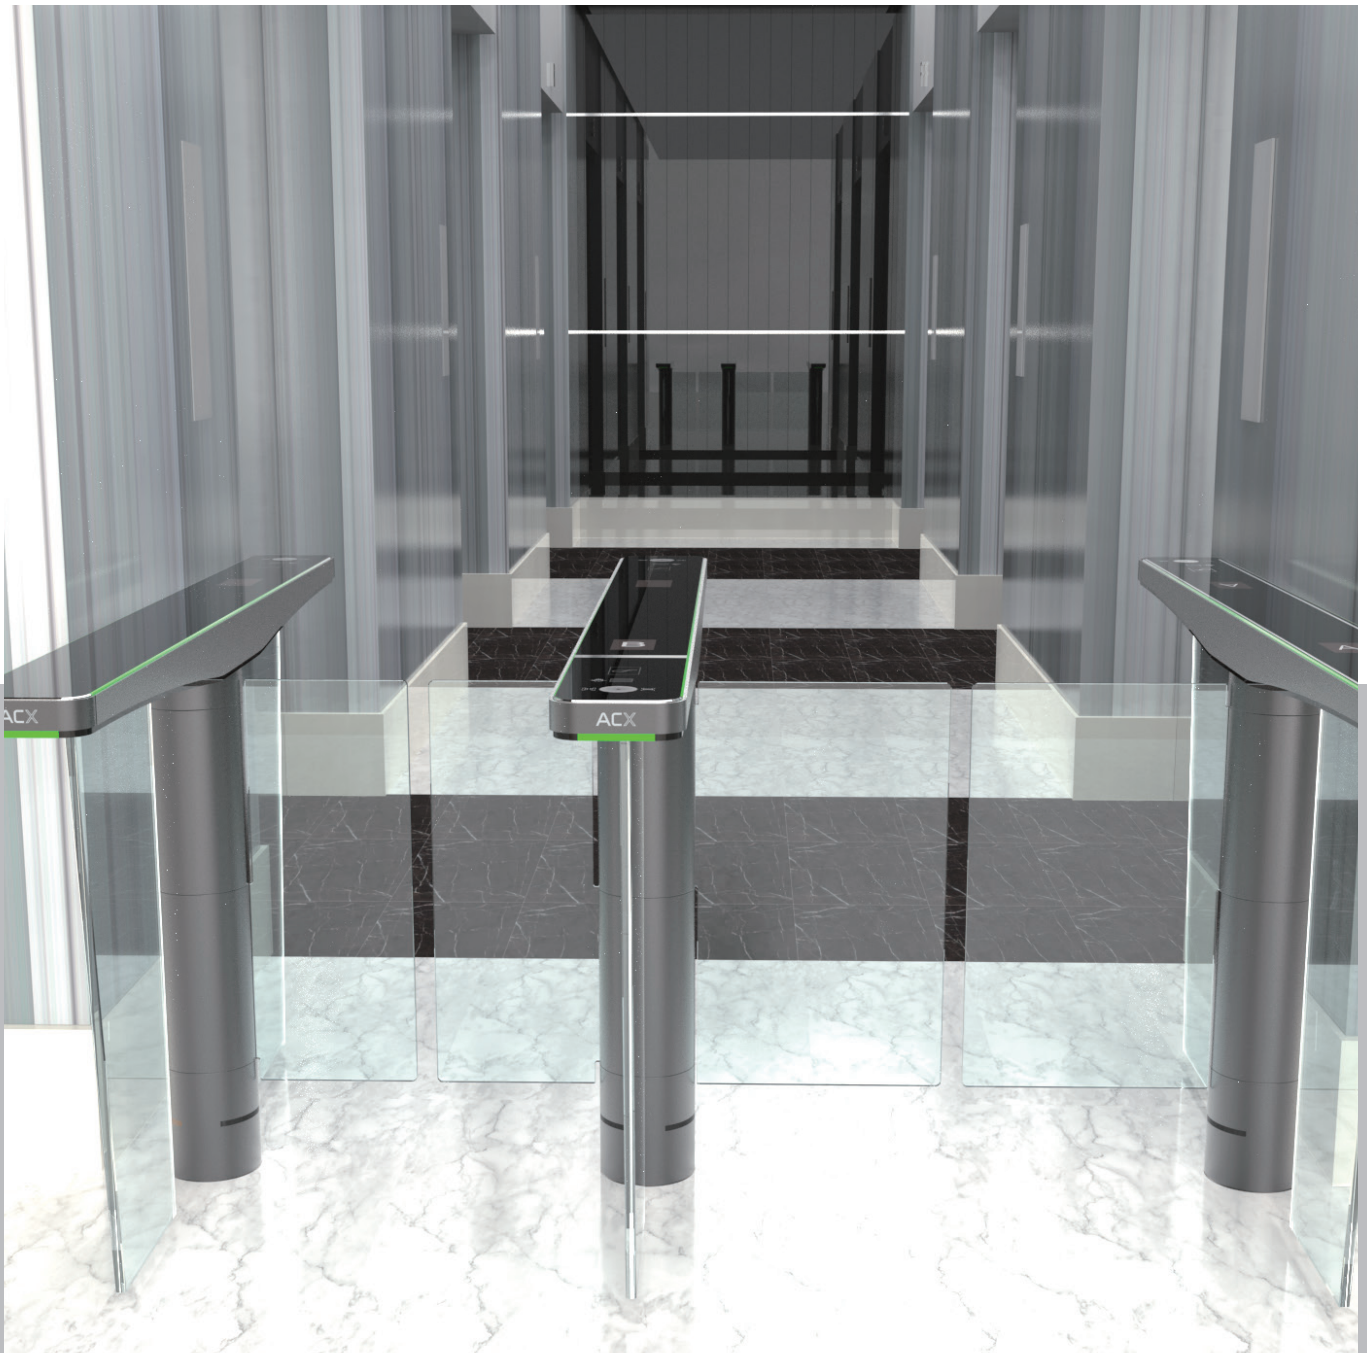


Scope of Application

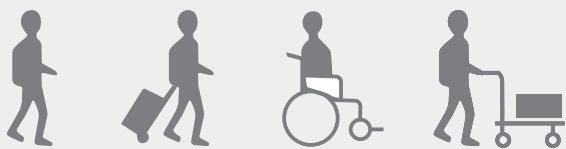

PS: within the height range

Ideal for: data centers / corporate offices / multistory buildings / educational institutions / financial institutions

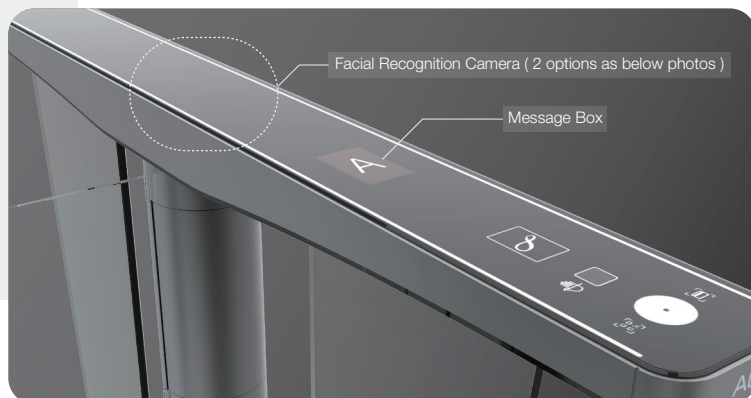

Support

13.56MHz



Scramble QR Code




Octopus



Palm Vein



2090
Facial Recognition
Camera

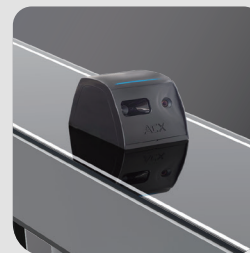


2098
Thermal and Facial
Recognition Camera



Specifications

• Model	T1
• Cabinet Material	SUS 304
• Usage	Indoor only
• Size	Standard 1800*180*1000 (mm)
• Obstacle Material	8mm tempered glass
• Width	600mm / 900mm

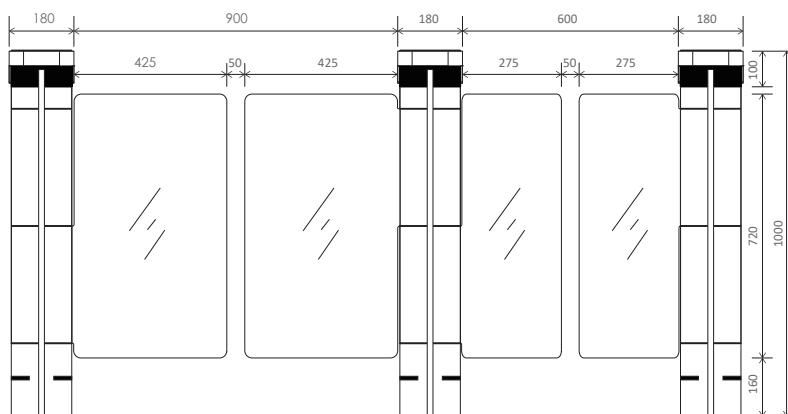

Highlights



9 dual-direction control modes



LED lights status / direction indication



Advanced protection to prevent electrical leakage, pinching, and collision



Remote control and configuration, user interface personalization



High detection accuracy using laser sensor




2D laser module: ground-level safety sensor for child-friendly passage



Standard external electrical interface, with photoelectric safety isolation



Enhanced anti-tailgating design

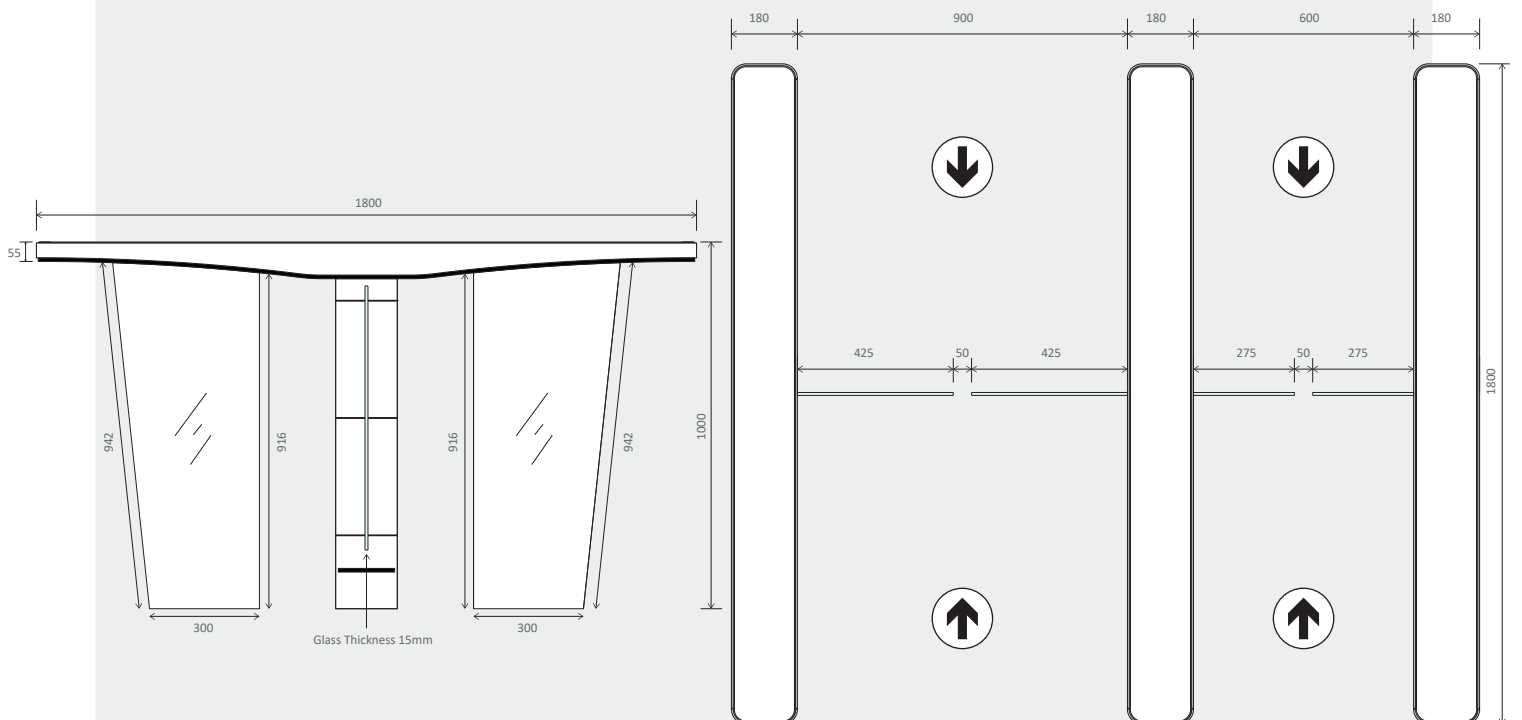

Customization

- Color spray or electroplating appearance
- Gate length: 1800mm (standard) / 1600mm / 1400mm
- Matte (standard) metal surface
- Obstacle length / height / printed pattern
- Printed pattern in card area
- Biometric authentication methods
- Flooring panels during installation (floor slotting not required)
- With 2090 Facial Recognition Camera / 2098 Thermal and Facial Recognition Camera



